

DESCRIPTION

The Ellipse[®] Model AR Annular Flow Meter is a multi-ported, self-averaging differential pressure flow element for liquid and gas applications. The Ellipse flow meter is designed with a series of ports facing the upstream velocity pressures and flow sensing ports strategically located ahead of the trailing edge flow separation.

COMPONENTS

All sensors are furnished with 1/2 in. (12 mm) instrument valves, flanged mounting hardware (with the proper ratings), and ID tag as standard equipment. Available options include integral 3-valve or 5-valve transmitter mount manifold and integral RTD temperature sensor.

FEATURES

- Patented elliptical design
- Single point pipe entry for DP, temperature and static pressure
- No dampening software required
- Low pressure loss (typically 3% of DP in a 12 in. (304 mm) line) due to the patented aerodynamic profile
- NIST traceable calibration, optional independent labs
- Accuracy: $\pm 0.75\%$ of reading, repeatability: $\pm 0.1\%$ of reading
- Turndown Ratio: 17:1; no vacuum effects
- No moving part construction provides long, trouble-free service life
- True static pressure measurement rather than a calculated value
- Overcomes loss of accuracy caused by fluid separation at the sensor body

CONFIGURATION

The flow element has a two-piece construction: an elliptical shape and two 100% independent flow sensing chambers. This construction prevents signal degradation and mixing, and does not require dampening hardware or software. The impact velocity sensing holes (high pressure) are located along the leading edge and the true static sensing holes (low pressure) are on the exterior probe side. This does not generate any vortices or vacuum effects that impinge on the static pressure measurement sensing area and has a drag coefficient of 0.32 or less. Each flow sensor is complete with instrument shutoff valves with provisions to accept a transmitter or direct indicating meter. An identification tag is supplied with specific flow station measurement information, as required.



MAXIMUM ALLOWABLE DP (INCHES OF WATER COLUMN)

Pipe Size	Single Support Probe Size (in.)		Double Support Probe Size (in.)	
	7/8	1-1/4	7/8	1-1/4
2 in. (50.80 mm)	880	—	2380	—
2-1/2 in. (63.50 mm)	525	—	1558	—
3 in. (76.20 mm)	396	—	1283	—
3-1/2 in. (88.90 mm)	283	—	1117	—
4 in. (101.60 mm)	197	—	980	—
5 in. (127.00 mm)	153	—	757	—
6 in. (152.40 mm)	126	—	669	—
8 in. (203.20 mm)	114	360	512	—
10 in. (254.80 mm)	100	240	315	960
12 in. (304.80 mm)	87	175	250	700
14 in. (355.60 mm)	53	147	195	585
16 in. (406.40 mm)	—	113	—	450
18 in. (457.20 mm)	—	90	—	360
20 in. (508.00 mm)	—	74	—	295
24 in. (609.60 mm)	—	68	—	270
26 in. (660.40 mm)	—	50	—	215
30 in. (762.00 mm)	—	34	—	155
32 in. (812.80 mm)	—	—	—	—
36 in. (914.40 mm)	—	—	—	—
42 in. (1066.80 mm)	—	—	—	—

SPECIFICATIONS


Applications	Liquids and gases
Pipe Size	2...72 in. (50...1830 mm)
Pressure	800 PSI (5515 kPa) max.
Temperature	800° F (426° C) max.
Accuracy	±0.75% of reading
Repeatability	±0.1%
Turndown Ratio	17:1 with no vacuum effect
Reynolds Number	>75,000: Maintains most accurate flow measurements <75,000: Consult factory for estimated results
Resonance	If greater than 0.8, use double support

STANDARD COMPONENTS

Component	Specifications
Head	T-type
Connection	316 SS 1/4 in. or 1/2 in. FNPT
Compression Fitting	CS 3000 lb. with SS ferrule
Weld Fitting	CS 3000 lb. – ASTM A105
Instrument Valves	2 per sensor, 316/316L SS Ellipse – 1/4 in. CS
ID Tag	316 SS with wire


DIMENSIONS

	Probe Length		Probe Width
	A	B	C
ARO	4.19 in. (106.38 mm)	2.25 in. (57.15 mm)	0.50 in. (12.70 mm)
AR	6.63 in. (168.28 mm)	3.13 in. (79.38 mm)	0.87 in. (22.10 mm)
AR1	6.63 in. (168.28 mm)	3.13 in. (79.38 mm)	1.25 in. (31.75 mm)

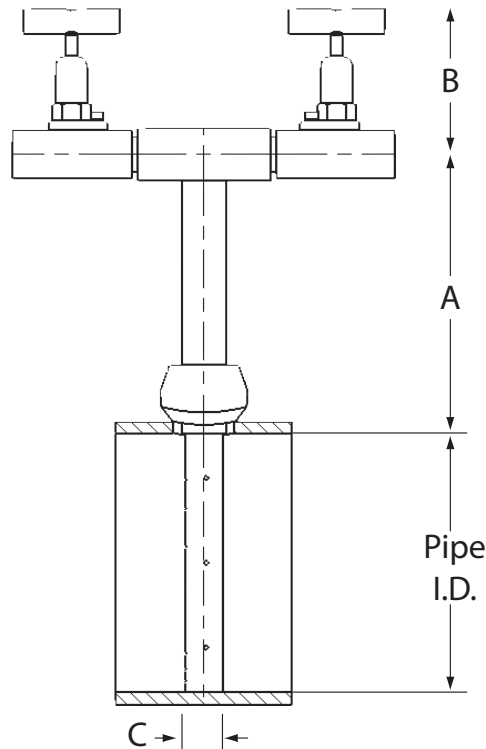

PART NUMBER MATRIX

PAR0 (1/2 in.), PAR (7/8 in.), PAR1 (1-1/4 in.)

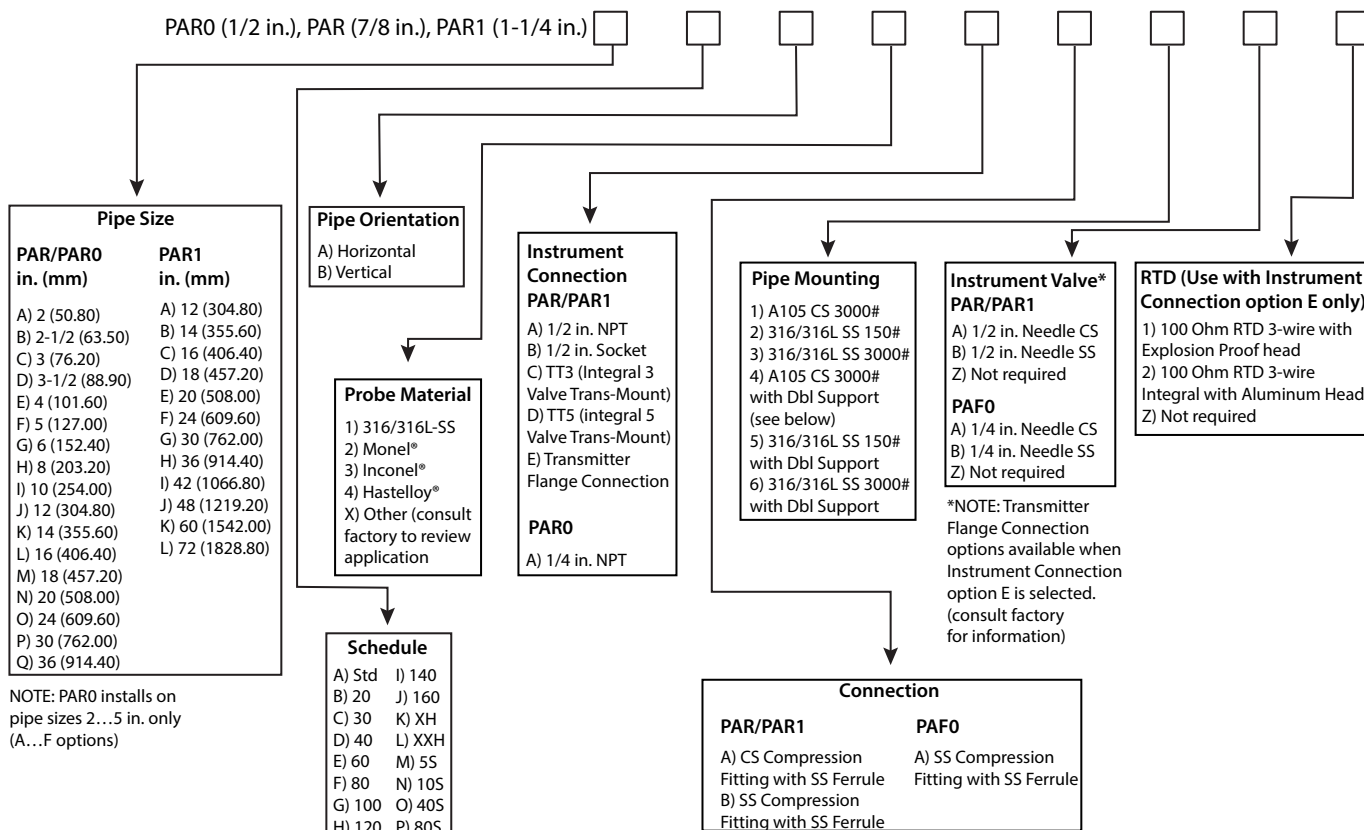

Control. Manage. Optimize.

Preso and Ellipse are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2017 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
Europe, Eastern Europe Branch Office (for Poland, Latvia, Lithuania, Estonia, Ukraine, Belarus) | Badger Meter Europe | ul. Korfantego 6 | 44-193 Knurów | Poland | +48-32-236-8787
Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412
Switzerland | Badger Meter Swiss AG | Mittelholzerstrasse 8 | 3006 Bern | Switzerland | +41-31-932 01 11